


SMD Power Inductor

CDRH104R



Description

- Ferrite drum core construction.
- Magnetically shielded.
- L × W × H: 10.5 × 10.3 × 4.0mm Max.
- Product weight: 1.5g(Ref.)
- Moisture Sensitivity Level: 1
- RoHS compliance.



Environmental Data

- Operating temperature range: -40°C ~ +100°C (including coil's self temperature rise)
- Storage temperature range: -40°C ~ +100°C
- Solder reflow temperature: 260 °C peak.


Packaging

- Carrier tape and reel packaging.
- 13" diameter reel.
- 1000pcs per reel.


Applications

- Ideally used in Notebook PC, LCD TV, DVD, Game machine, STB, Projector etc as DC-DC converter inductors.


Dimension - [mm]

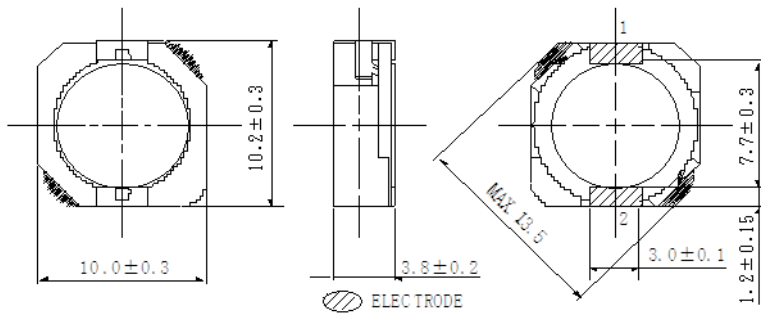

Land patterns - [mm]



Schematics

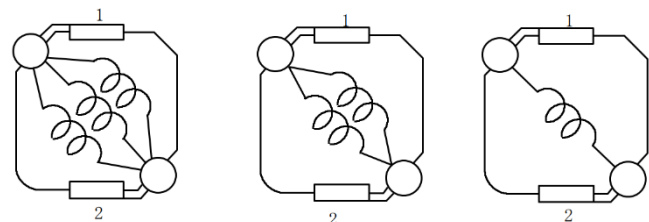

(1.5μH ~ 5.2μH, 10μH) (7.0μH, 12μH ~ 33μH) (39μH ~ 330μH)

Note: This specification is subject to change without notice. Please contact your nearest sales office for updated information when placing an order.

SMD Power Inductor

CDRH104R



Electrical Characteristics

PART NO.	STAMP	INDUCTANCE [WITHIN] ※1	D.C.R. (mΩ) [MAX.] (TYP.) (at 20°C)	SATURATION CURRENT (A) MAX. (TYP.) ※2	TEMPERATURE RISE CURRENT (A) ※3
CDRH104RNP-1R5NC	1R5	1.5 μH ± 30%	8.10 (6.00)	10.0(12.5)	8.50
CDRH104RNP-2R5NC	2R5	2.5 μH ± 30%	10.5(7.80)	7.90(9.90)	7.70
CDRH104RNP-3R8NC	3R8	3.8 μH ± 30%	13.0(9.60)	7.00(8.80)	7.40
CDRH104RNP-5R2NC	5R2	5.2 μH ± 30%	22.0(16.0)	5.60(7.00)	6.00
CDRH104RNP-7R0NC	7R0	7.0 μH ± 30%	27.0(20.0)	5.25(6.60)	5.30
CDRH104RNP-100NC	100	10 μH ± 30%	35.0(26.0)	4.48(5.60)	4.50
CDRH104RNP-120NC	120	12 μH ± 30%	46.0(34.0)	4.00(5.00)	3.80
CDRH104RNP-150NC	150	15 μH ± 30%	50.0(37.0)	3.50(4.40)	3.70
CDRH104RNP-180NC	180	18 μH ± 30%	69.0(51.0)	3.25(4.10)	3.10
CDRH104RNP-220NC	220	22 μH ± 30%	73.0(54.0)	2.85(3.60)	2.80
CDRH104RNP-270NC	270	27 μH ± 30%	88.0(65.0)	2.60(3.28)	2.70
CDRH104RNP-330NC	330	33 μH ± 30%	93.0(69.0)	2.30(2.90)	2.60
CDRH104RNP-390NC	390	39 μH ± 30%	127(94.0)	2.10(2.62)	2.40
CDRH104RNP-470NC	470	47 μH ± 30%	128(95.0)	1.95(2.44)	2.30
CDRH104RNP-560NC	560	56 μH ± 30%	188(139)	1.74(2.18)	1.75
CDRH104RNP-680NC	680	68 μH ± 30%	213(158)	1.66(2.08)	1.68
CDRH104RNP-820NC	820	82 μH ± 30%	283(218)	1.50(1.88)	1.48
CDRH104RNP-101NC	101	100 μH ± 30%	304(225)	1.33(1.66)	1.42
CDRH104RNP-121NC	121	120 μH ± 30%	375(278)	1.25(1.56)	1.20
CDRH104RNP-151NC	151	150 μH ± 30%	506(375)	1.12(1.40)	1.15
CDRH104RNP-181NC	181	180 μH ± 30%	568(421)	0.99(1.24)	1.00
CDRH104RNP-221NC	221	220 μH ± 30%	756(560)	0.95(1.19)	0.88
CDRH104RNP-271NC	271	270 μH ± 30%	853(632)	0.85(1.06)	0.68
CDRH104RNP-331NC	331	330 μH ± 30%	1,090(810)	0.74(0.92)	0.66

※1 Inductance measuring condition: at 100kHz.

※2 The saturation current: This indicates the value of DC current when the inductance decreases to 65% of its initial value.

※3 The temperature rise: The value of DC current when the temperature rise is $\Delta T=40^{\circ}\text{C}$ ($T_a=20^{\circ}\text{C}$).













Note: This specification is subject to change without notice. Please contact your nearest sales office for updated information when placing an order.

SMD Power Inductor

CDRH104R



Saturation Current & Temperature Rise Graph — L (20°C) — L (105°C) — ΔT

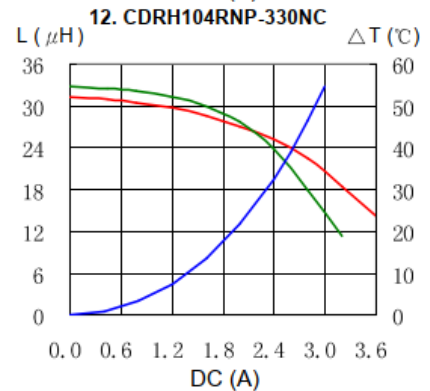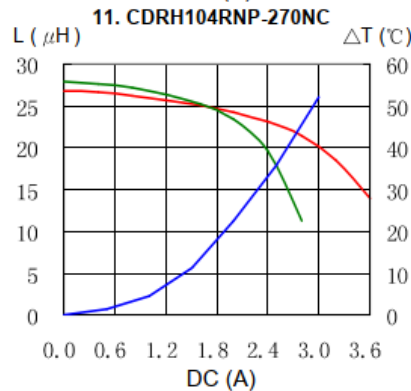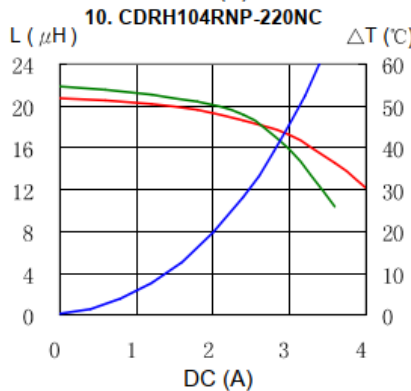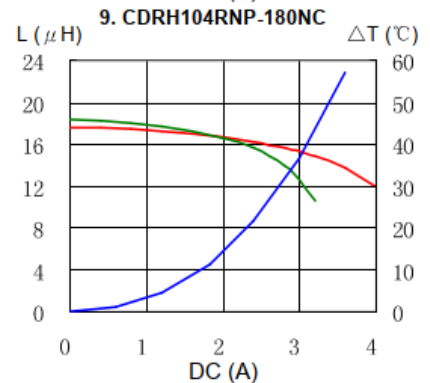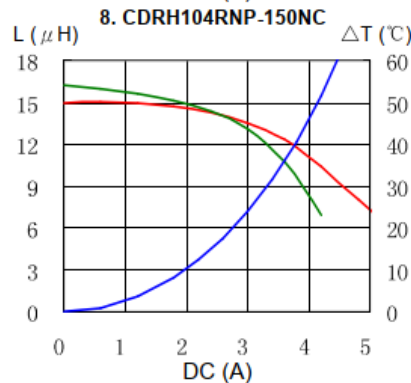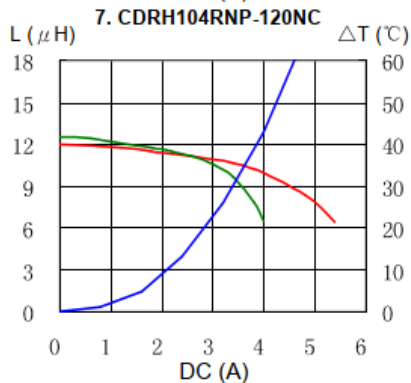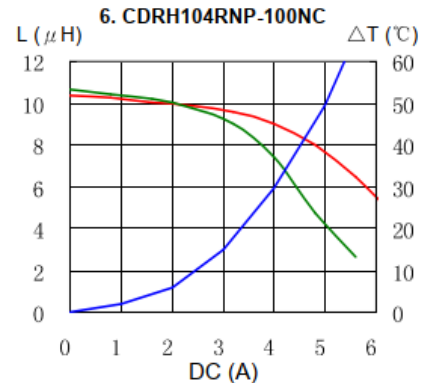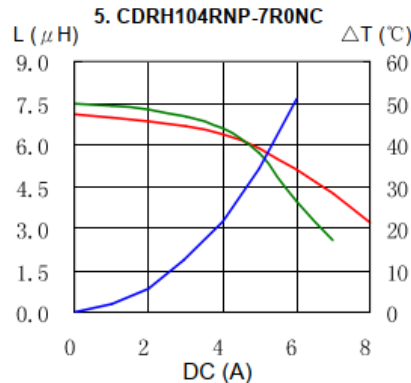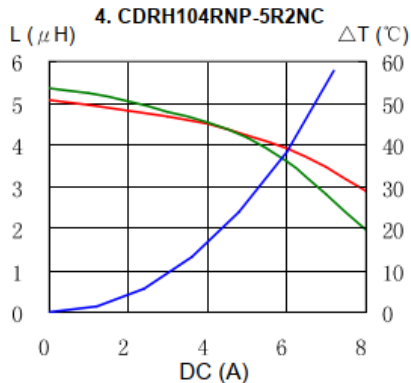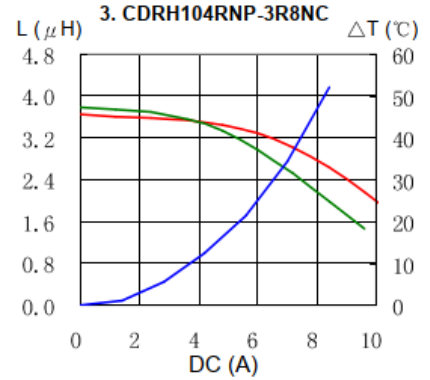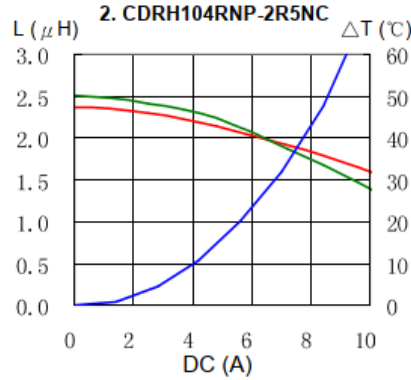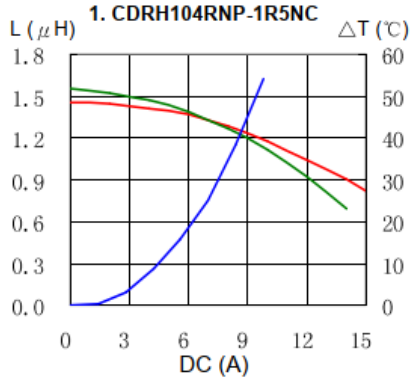













Note: This specification is subject to change without notice. Please contact your nearest sales office for updated information when placing an order.

SMD Power Inductor

CDRH104R



Saturation Current & Temperature Rise Graph — L (20°C) — L (100°C) — ΔT

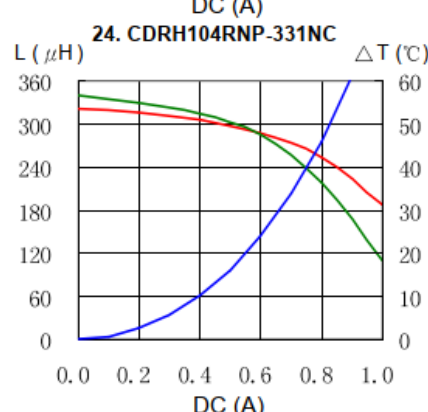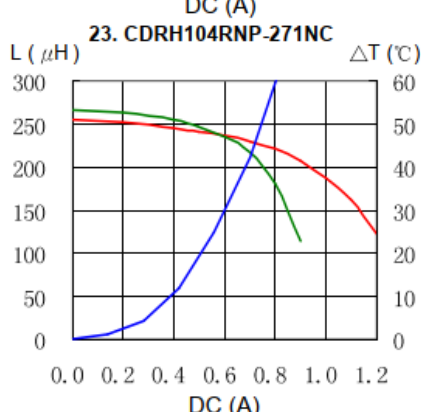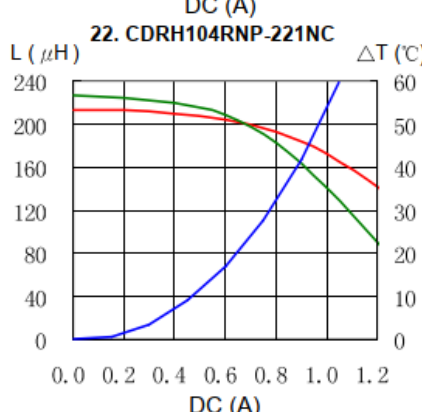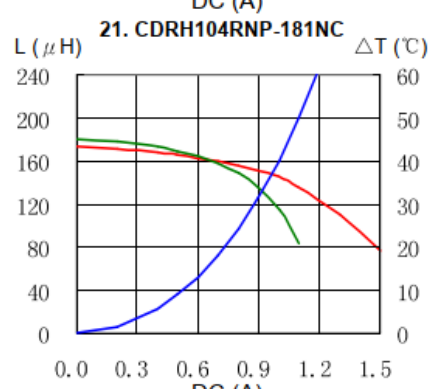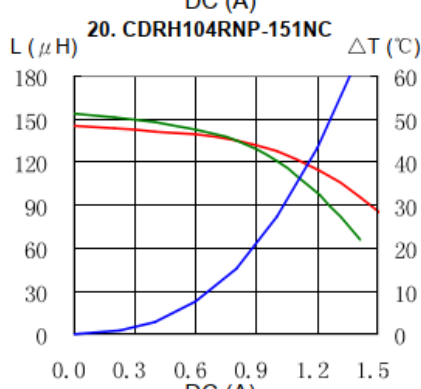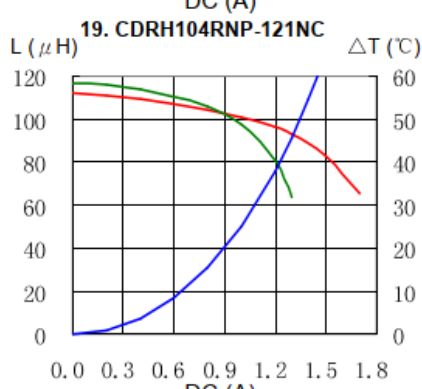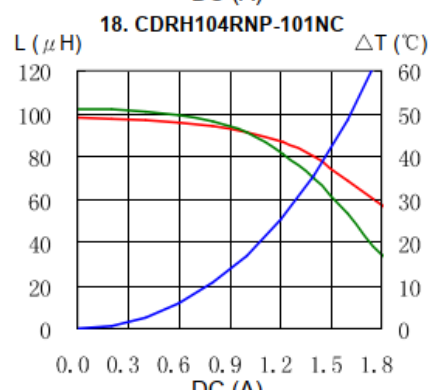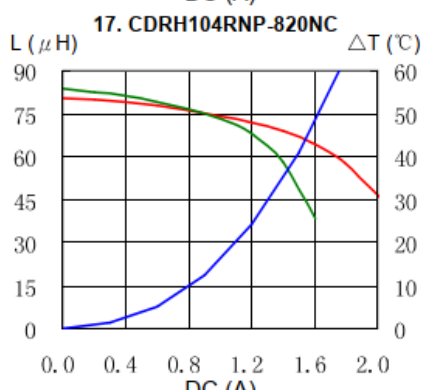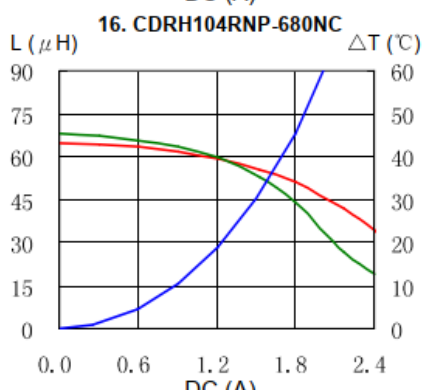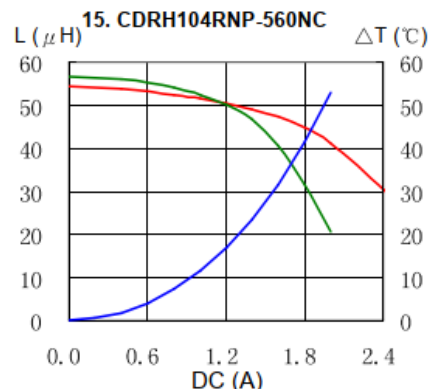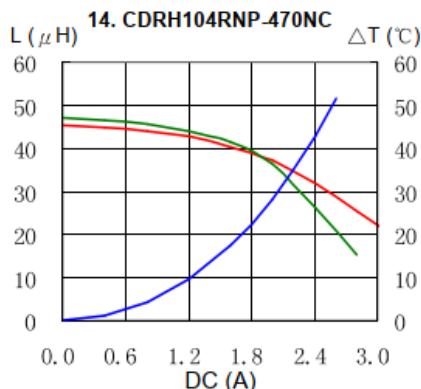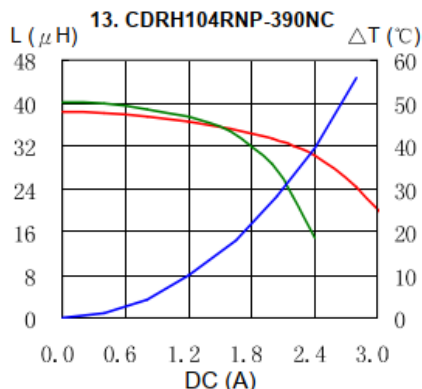



Note: This specification is subject to change without notice. Please contact your nearest sales office for updated information when placing an order.

SMD Power Inductor

CDRH104R



Solder Reflow Condition

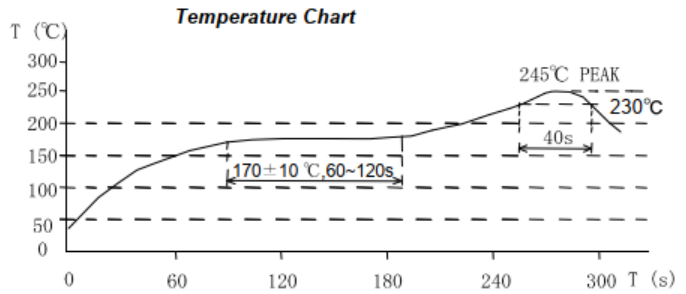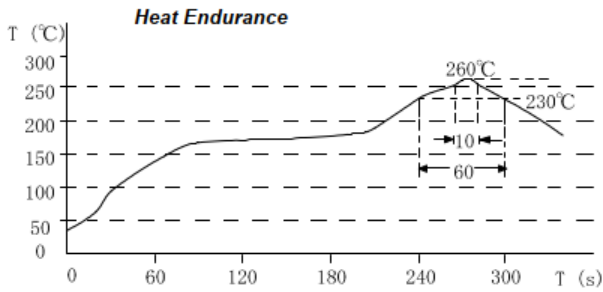

For sales office information, please [click here](#) to visit our website.

Note: This specification is subject to change without notice. Please contact your nearest sales office for updated information when placing an order.